
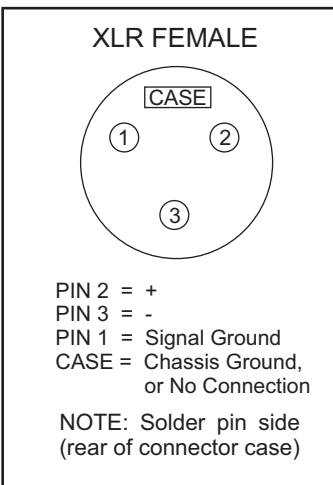


3-PIN XLR AES AUDIO PINOUT

The AES balanced audio XLR hookup is shown here. It is sometimes referred to as “Pin-2 Hot.” Note that, while this is the most common pinout, it is not universal. (See Application of Connectors, Part 1, XLR-type Polarity and Gender, AES14-1992.)

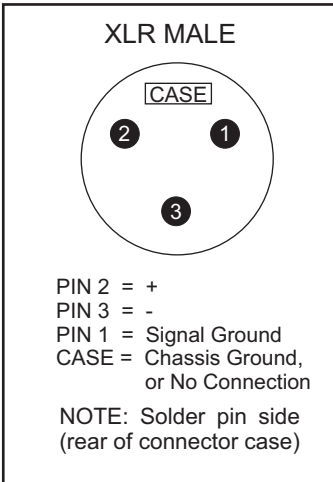

REICHENBACH ENGINEERING